


NOTE : MEANS OF DISCONNECT MAY BE REQUIRED TO COMPLY WITH THE NEC WHEN THE DISTRIBUTION PANEL IS LOCATED UNDER THE COUNTER. COMPLIANCE WITH THE NEC IS THE RESPONSIBILITY OF THE PURCHASER OF THE BUILDING


PLAN VIEW (N.T.S.)

STANDARD ITEMS FOR AN ECONO 4848DSL DURALUMINUM BUILDING

- ① — 100 AMP SINGLE PHASE 12 CIRCUIT MAIN LOAD CENTER
- ② — 115V DUPLEX, 230V OUTLET
- ③ — 40 WATT LIGHT FIXTURE
- ④ — 22" DEEP SHELF
- ⑤ — 3" OVERHANG EXTERIOR ROOF (OPTIONAL)
(REFER TO DURALUMINUM ECONO SPECIFICATIONS FOR TYPICAL CONSTRUCTION)

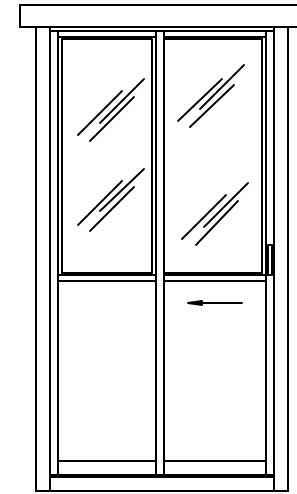

ELEVATION A

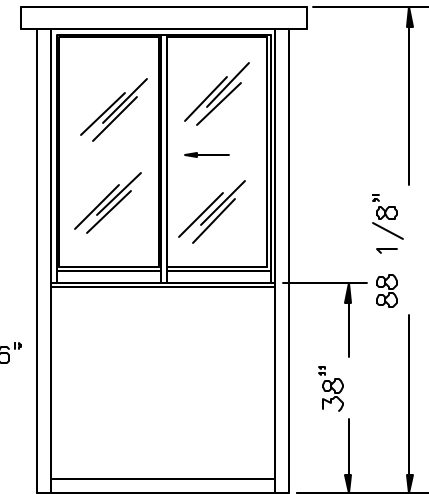

ELEVATION B

NOTE : BUILDING HEIGHT WITHOUT EXTERIOR ROOF— 86 9/16"

PORTA-KING BUILDING SYSTEMS

4133 SHORELINE DRIVE EARTH CITY, MISSOURI 63045
1-800-456-5464 FAX 314-291-2857 www.portaking.com

TITLE

DURALUMINUM ECONO 4848DSL