


PLAN VIEW

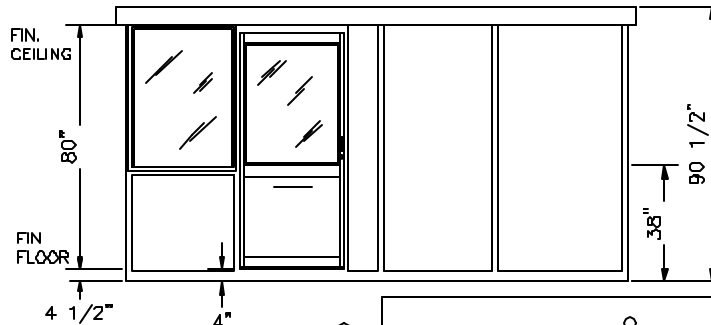

STANDARD ITEMS FOR A DISABLED ACCESSIBLE PC-DAR147SL STEEL BUILDING (REFER TO DURASTEEL SPECIFICATIONS FOR TYPICAL CONSTRUCTION)

- ① 100 AMP SINGLE PHASE 12 CIRCUIT MAIN LOAD CENTER
- ② 115V DUPLEX, 230V OUTLET
- ③ 80 WATT LIGHT FIXTURE W/SWITCH
- ④ 40 WATT LIGHT FIXTURE W/SWITCH
- ⑤ 22" DEEP SHELF
- ⑥ 3" OVERHANG EXTERIOR ROOF (OPTIONAL)

STANDARD FEATURES DESIGNED INTO BOOTH TO MEET ADA GUIDELINES.



- * MANEUVER WITHIN BOOTH- 60" DIAMETER
- * DOOR CLEARANCES- 32" CLEAR OPENING, 1/2" HIGH THRESHOLD
- * SHELF- 32" A.F.F.
- * CASHIER WINDOW- 32" A.F.F.
- * CEILING HEIGHT- 80"

{ACCESSIBLE ROUTE TO BOOTH- BOOTH CAN BE DESIGNED TO MEET ON SITE CONDITIONS, EXAMPLE; DOOR LOCATION AND THRESHOLD HEIGHT}

PORTA-KING BUILDING SYSTEMS

4133 SHORELINE DRIVE EARTH CITY, MISSOURI 63045
 1-800-456-5464 FAX 314-291-2857 www.portaking.com

TITLE	DURASTEEL MODEL PC-DAR147SL
-------	-----------------------------