



PLAN VIEW
(N.T.S.)


DOORS AVAILABLE BOTH SIDES—SUFFIX DSL

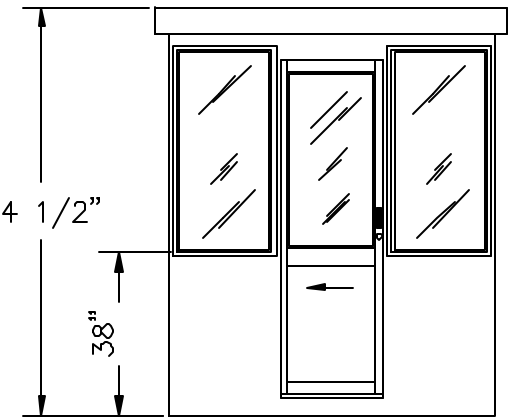

ELEVATION A

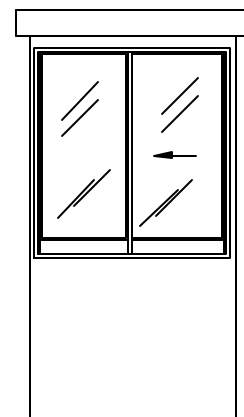

ELEVATION B

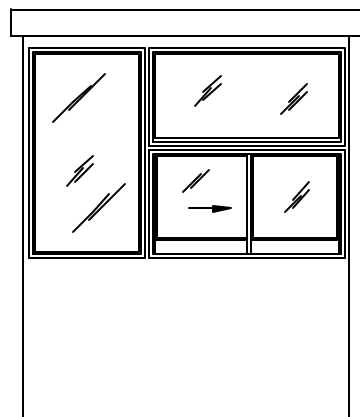

ELEVATION C

STANDARD ITEMS FOR A 64CSL STEEL BUILDING

- ①— 100 AMP SINGLE PHASE 12 CIRCUIT MAIN LOAD CENTER
- ②— 115V DUPLEX, 230V OUTLET
- ③— 40 WATT LIGHT FIXTURE
- ④— 22" DEEP SHELF
- ⑤— 3" OVERHANG EXTERIOR ROOF (OPTIONAL)

* HORIZONTAL SLIDING CASHIER WINDOW
(REFER TO DURASTEEL SPECIFICATIONS
FOR TYPICAL CONSTRUCTION)

PORTA-KING BUILDING SYSTEMS

4133 SHORELINE DRIVE EARTH CITY, MISSOURI 63045
1-800-456-5464 FAX 314-291-2857 www.portaking.com

TITLE

DURASTEEL MODEL 64CSL