


ELEVATION A

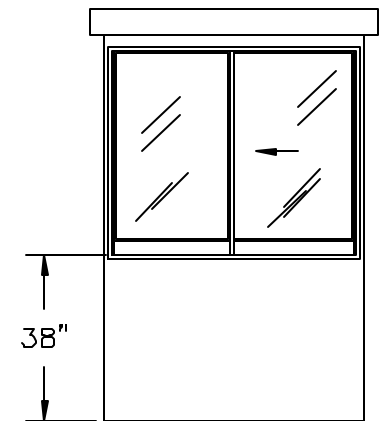

ELEVATION B

DOORS AVAILABLE BOTH SIDES-SUFFIX DSL  
 CASHIER WINDOW AVAILABLE  
 IN SLIDING DOOR-SUFFIX CSL

STANDARD ITEMS FOR A 75SL STEEL BUILDING

- ① — 100 AMP SINGLE PHASE 12 CIRCUIT MAIN LOAD CENTER
- ② — 115V DUPLEX, 230V OUTLET
- ③ — 40 WATT LIGHT FIXTURE
- ④ — 22" DEEP SHELF
- ⑤ — 3" OVERHANG EXTERIOR ROOF (OPTIONAL)  
 (REFER TO DURASTEEL SPECIFICATIONS  
 FOR TYPICAL CONSTRUCTION)

*PORTA-KING* BUILDING SYSTEMS

4133 SHORELINE DRIVE EARTH CITY, MISSOURI 63045  
 1-800-456-5464 FAX 314-291-2857 www.portaking.com

TITLE

DURASTEEL MODEL 75SL